

The British University in Egypt

BUE Scholar

Petroleum Engineering and Gas

Energy and Environmental Engineering

Fall 9-27-2020

Anti-collision Planning Optimization in Directional Wells

abduhrahman mohamed
abduhrahman.mohamed@bue.edu.eg

Follow this and additional works at: https://buescholar.bue.edu.eg/pet_eng_gas



Part of the [Petroleum Engineering Commons](#)

Recommended Citation

A.Mohamed,(2020):Anti-collision Planning Optimization in Directional Wells;Petroleum and Coal.vol 62.Issue(4).pp1144-1152.

This Article is brought to you for free and open access by the Energy and Environmental Engineering at BUE Scholar. It has been accepted for inclusion in Petroleum Engineering and Gas by an authorized administrator of BUE Scholar. For more information, please contact bue.scholar@gmail.com.

Anti-collision Planning Optimization in Directional Wells

Abdulrahman Mohamed

Department of Petroleum Engineering and Gas Technology, Faculty of Energy and Environmental Engineering, The British University in Egypt, Cairo, Egypt

Received April 21, 2019; Accepted July 22 2020

Abstract

One of the most application of the directional drilling is drilling multiple wells from one location or platform. In drilling multiple wells from one location the major problem that faced is avoiding the collision with the offset wells that drilled near the proposed well in the same region. Therefore, the potential of collision between the wells can cause severe catastrophic accidents such as an explosion or oil spill. Several measurements of proximity calculation or methods have been adopted to control the distance between the wells, avoid the collision, increasing the clearance along with smoothing the trajectory, Reducing the drilling time based on the anti-collision rules. A real case study of an offshore directional horizontal well drilled from the platform is studied through the paper. The proposed well is drilled in the neighboring of three offset wells that should be planned completely to avoid the collision with them. The well is planned through an advanced anti-collision method that results in preventing the collision of well with optimized drilling performance through Oriented separation factor (OSF). This factor yields appropriate separation with OSF greater than 5. This yield efficient separation with offset well 1, offset well 2 and offset well 3 greater than 5, In addition to optimized drilling performance of 84% drilling versus 16% sliding that results in the completion of the well in 50 days with positive income that result in 8.55 Return on Investment (ROI).

Keywords: *Anti-Collision Planning; Proximity Methods; Oriented Separation Factor; Anti-Collision Rules; Separation Factor; Alert Zones.*

1. Introduction

Directional drilling is one of the most challenging and attractive techniques that help to solve many problems that vertical drilling cannot solve as drilling multiple wells from the same location in offshore drilling instead of having a platform for each well [1]. However, the drilling of multiple wells in the same location causes a high risk of Collision between the wells that can cause severe catastrophic accidents and loss of production. Therefore, the distance between the center of the offset and subject well must be calculated in order to avoid the collision by an offset well [2]. This can be achieved by accurate well planning taken into consideration separation from the offset wells. Another challenging problem is arising in determining the distance between the wells by the surveying because the surveying instrument does not give an accurate distance between the wells [3]. Poedjono [4] indicated that the center to center distance can be considered as the distance between the planned or subject well to the offset well which scanned by the minimum perpendicular method. Moreover, Spidle [5] stated that there is a more accurate method than the perpendicular method to estimate the accurate distance through horizontal distance measurement. Moreover, there is some uncertainty should be defined well and calculated to ensure the accurate positioning of the wellbore [6]. Therefore, gathering accurate information about the offset wells in the same working area is significant for avoiding the collision and for the future well planning [7]. In conclusion, another method than the calculation of the distance between the wells is to graph the subject well along with offset wells to control the collision in real-time [8].

2. Methods

The anti-collision planning methods were used for the field data of the subject well through determining the distance between the proposed well and offset wells. Then evaluating the distance between the wells through including the uncertainty of the surveying position through radii of uncertainty. After quantifying the separation between the wells, the well is classified and monitored through anti-collision rules to prevent the collision and redesign the high-risk segment of the wells. The more details of the used method are shown below.

2.1. Proximity method used

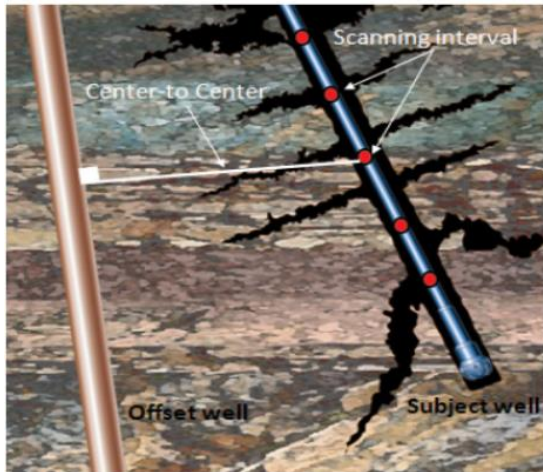


Fig. 1. 3D Least Distance Proximity Method

The first step in proximity is gathering information from the database of the working area to identify the offset wells that have high collision risk. These data showed three offset wells that show the high significant risk of collision. These wells were evaluated through the calculation of the distance between them and the proposed well through 3D least Distance Proximity method. This method is the most accurate method as it measures the shortest distance between the wells with high accuracy as it divided the well into small intervals and measure the shortest distance as shown in Fig.1 shows the distance measurement method.

2.2. Proximity calculations used

The proximity calculations were made after determining the distance between the offset well and subject well through proximity method. These method results in the center to center distance between wells but is not of high accuracy due to uncertainty of positioning of wells during the surveying method. Therefore, more proximity calculate is carried out to correct the separation between the wells as following.

2.2.1. Separation factor (SF)

SF, corrects the separation between the wells by considering the uncertainty of position between the subject well and the offset well.

Mathematically, it represents the ratio between the center to center distance between the offset and subject well to the sum of the radii of the ellipsoid of uncertainty (EOU).

$$SF = S / (er + eo) \quad (1)$$

where S is the distance between the center to center of the reference and offset well; er semi-major radius of the ellipsoid of the uncertainty of reference well; eo semi-major radius of the ellipsoid of the uncertainty of offset well.

2.2.2. Oriented separation factor (OSF)

OSF provides a more accurate method for quantifying the separation between the wells and the EOR separation by taking into consideration the fixed probability of collision as described by SF equal to one. Furthermore, OSF considers the shape and geometry of the EOU resulting that all scenarios with the same SF have the same probability or chance of collision. Mathematically, describes as in the equation (2);

$$OSF = Clearance / (Relative Positional Uncertainty) \quad (2)$$

2.2.3. Allowable deviation from the plan (ADP)

The allowable deviation from plane provides the drilling channel that created due to the avoidance of any proximity approach violation detected by oriented separation factor. It represented by distance radially from the plan at any point to the distance which the drilled can be allowed to deviate or depart from plan through drilling process in order to increase the drilling efficiency along without violating the anti-collision rules.

2.2.3. Minimum allowable separation (MAS)

The minimum allowable separation (MAS) measure the minimum distance between the center to center of the subject and offset well that is allowable with emphasizing on anti-collision rules. Therefore, the actual distance between the center to center between subject and offset wells during the normal drilling process can be obtained by summing the minimum allowable separation with allowable deviation from the plan.

2.3. Anti-collision rules used based on proximity calculations

Anti-collision planning between the offset wells and subject well is controlled through anti-collision rules that characterize and classify the risk degree of the collisions. These classifications are divided as alert zones, a minor risk well and major risk well as shown in the Fig.2.

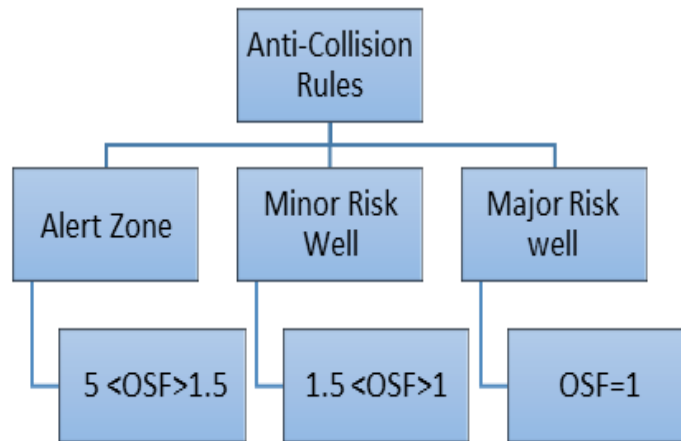


Fig. 2. Anti-Collision rules

3. Results

Real Case study of offshore horizontal well for Company X is used for anti-collision planning optimization through a novel method of OSF. The results below show the optimization and controlling of the directional well to control the collision through calculations and graphical methods.

3.1. Results of the anti-collision proximity calculations of the offset wells 1

Table 1 shows the clearance calculations between the subject well and the offset well 1 with respect of MD, TVD, North and East coordinates of both wells. In addition to the closest distance between the two wells. From the calculations, it shows that distance between the subject and offset well 1 were 1.29 ft at 278.87 ft MD and increase gradually till reaching the target at 3796.24 ft at 9071.29 MD. This indicated that the separation between the two wells was to low and increase as deepening of the well according to the OSF method that must keep OSF greater than 5.

Table 1. Clearance calculations (Offset Well1)

Refer-ence	Refer-ence	Reference	Reference	Offset	Offset	Offset	Offset	Angle From	Closest Ap- proach Distance
MD [ft]	TVD [ft]	North[ft]	East[ft]	MD [ft]	TVD [ft]	North[ft]	East[ft]	High side [deg]	[ft]
82.02	82.02	0.00N	0.00E	82.02	82.02	0.00N	0.00E	0	0
278.87	278.87	0.00N	0.00E	278.86	278.86	0.95N	0.87E	42.3	1.29
393.7	393.7	0.00N	0.00E	393.65	393.63	2.42N	2.19E	42.3	3.26
1312.34	1310.05	56.05S	0.00E	1303.9	1302.55	36.70N	33.35E	-159.9	98.85
1430.45	1427.28	70.44S	0.00E	1419.13	1417.36	43.95N	39.93E	-160.4	121.56
2119.42	2114.55	112.47S	0.00E	2091.08	2085.12	99.05N	90.00E	23.1	231.75
2736.22	2731.34	112.47S	0.00E	2690.09	2677.07	166.71N	151.48E	28.5	322.24
4265.09	4260.22	112.47S	0.00E	4138.37	4089.54	401.72N	365.03E	35.4	653.28
4429.13	4424.26	112.47S	0.00E	4287.53	4233.1	431.67N	392.24E	35.8	697.48
4986.88	4975.88	72.39S	58.96W	4786.73	4710.61	539.33N	490.07E	92.7	863.71
7208.01	6502.9	758.72N	1281.44W	6042.34	5888.05	861.31N	782.63E	84.6	2156.15
7381.89	6545.82	853.43N	1420.75W	6072.78	5916.12	870.03N	790.56E	79.3	2299.28
7665.62	6586.53	1011.18N	1652.79W	6095.1	5936.7	876.43N	796.37E	69.1	2537.49
7988.68	6611.93	1192.26N	1919.13W	6101.06	5942.19	878.14N	797.92E	69.4	2815.96
8087.66	6617.48	1247.58N	2001.02W	6100.7	5941.86	878.03N	797.83E	64.8	2902.85
9071.29	6650.26	1795.60N	2817.18W	6075.45	5918.58	870.80N	791.26E	63.7	3796.24

3.2. Results of the anti-collision proximity calculations of the offset wells 2

Table 2 also, shows the clearance calculations between the subject well and the offset well 2 with respect of MD, TVD, North and East coordinates of both wells. In addition to the closest distance between the two wells. Accordingly, it shows that distance between the subject and offset well 2 were 4.27 ft at 278.87 ft MD and increase gradually till reaching the target at 5736.22 ft at 9071.29 MD. This indicated that the separation between the two wells was to low and increase as deepening of the well according to the OSF method that must keep OSF greater than 5.

Table 2. Clearance calculations (Offset Well 2)

Refer-ence	Refer-ence	Reference	Reference	Offset	Offset	Offset	Offset	Angle From	Closest Ap- proach Distance
MD [ft]	TVD [ft]	North[ft]	East[ft]	MD [ft]	TVD [ft]	North[ft]	East[ft]	High side [deg]	[ft]
82.02	82.02	0.00N	0.00E	82.02	82.02	0.00N	0.00E	0	0
278.87	278.87	0.00N	0.00E	278.77	278.71	3.79N	1.97E	27.4	4.27
393.7	393.7	0.00N	0.00E	393.19	392.94	9.51N	4.93E	27.4	10.74
1312.34	1310.05	56.05S	0.00E	1269.51	1251.88	76.44N	146.50E	-130.3	205.92
1430.45	1427.28	70.44S	0.00E	1373.94	1350.33	84.35N	180.37E	-128.7	249.83
2119.42	2114.55	112.47S	0.00E	1926.83	1847.11	124.75N	417.71E	60.4	549.8
2736.22	2731.34	112.47S	0.00E	2373.97	2214.07	154.73N	671.09E	68.3	888.45
4265.09	4260.22	112.47S	0.00E	3491.75	3076.43	207.91N	1379.74E	76.9	1845.98
4429.13	4424.26	112.47S	0.00E	3628.43	3180.79	210.90N	1467.95E	77.6	1950.81
4986.88	4975.88	72.39S	58.96W	3988.14	3455.64	214.97N	1699.96E	125.2	2342.55
7208.01	6502.9	758.72N	1281.44W	4331.99	3714.32	216.86N	1926.49E	36.6	4284.93
7381.89	6545.82	853.43N	1420.75W	4252.58	3654.5	216.45N	1874.26E	31.2	4429.74
7665.62	6586.53	1011.18N	1652.79W	4120.73	3555.73	215.81N	1786.93E	24.8	4652.96
7988.68	6611.93	1192.26N	1919.13W	4020.33	3480.01	215.19N	1720.99E	23.6	4900.42
8087.66	6617.48	1247.58N	2001.02W	3971.42	3442.98	214.86N	1689.04E	21.5	4975.99
9071.29	6650.26	1795.60N	2817.18W	3545.91	3117.77	209.16N	1414.71E	17.1	5736.22

3.3. Results of the anti-collision proximity calculations of the offset wells 3

In addition, Table 3 shows the clearance calculations between the subject well and the offset well 3 with respect of MD, TVD, North and East coordinates of both wells. In addition to the closest distance between the two wells. Accordingly, it shows that distance between the subject and offset well 3 were 2.63 ft at 278.87 ft MD and increase gradually till reaching the target at 1813 ft at 9071.29 MD. This separation is lower than in offset well 1 and offset well

2 which yield that well 3 had a high potential of the collision but it keeps away from the subject well by considering the OSF greater than 5.

Table 3. Clearance report (Offset Well 3)

Reference	Reference	Reference	Reference	Offset	Offset	Offset	Offset	Angle From High side [deg]	Closest Approach Distance [ft]
MD [ft]	TVD [ft]	North[ft]	East[ft]	MD [ft]	TVD [ft]	North[ft]	East[ft]		
82.02	82.02	0.00N	0.00E	82.02	82.02	0.00N	0.00E	0	0
278.87	278.87	0.00N	0.00E	278.83	278.81	1.35N	2.26E	59.2	2.63
393.7	393.7	0.00N	0.00E	393.52	393.43	3.38N	5.67E	59.2	6.61
1312.34	1310.05	56.05S	0.00E	1287.93	1279.93	50.46N	101.55E	-135.1	150.21
1430.45	1427.28	70.44S	0.00E	1396.67	1385.83	60.69N	123.96E	-135.3	185.15
2119.42	2114.55	112.47S	0.00E	2034.88	2003.05	150.11N	257.67E	44.5	384.41
2736.22	2731.34	112.47S	0.00E	2627.91	2567.68	300.38N	356.03E	40.8	569.2
4265.09	4260.22	112.47S	0.00E	4205.45	4062.25	742.51N	186.78E	12.3	897.26
4429.13	4424.26	112.47S	0.00E	4370.83	4216.88	786.20N	147.66E	9.3	934.04
4986.88	4975.88	72.39S	58.96W	4898.09	4713.85	918.90N	32.13E	58.5	1029.37
82.02	82.02	0.00N	0.00E	82.02	82.02	0.00N	0.00E	0	0
278.87	278.87	0.00N	0.00E	278.83	278.81	1.35N	2.26E	59.2	2.63
393.7	393.7	0.00N	0.00E	393.52	393.43	3.38N	5.67E	59.2	6.61
1312.34	1310.05	56.05S	0.00E	1287.93	1279.93	50.46N	101.55E	-135.1	150.21
1430.45	1427.28	70.44S	0.00E	1396.67	1385.83	60.69N	123.96E	-135.3	185.15
2119.42	2114.55	112.47S	0.00E	2034.88	2003.05	150.11N	257.67E	44.5	384.41

3.4. Clearance between the subject well and offset wells

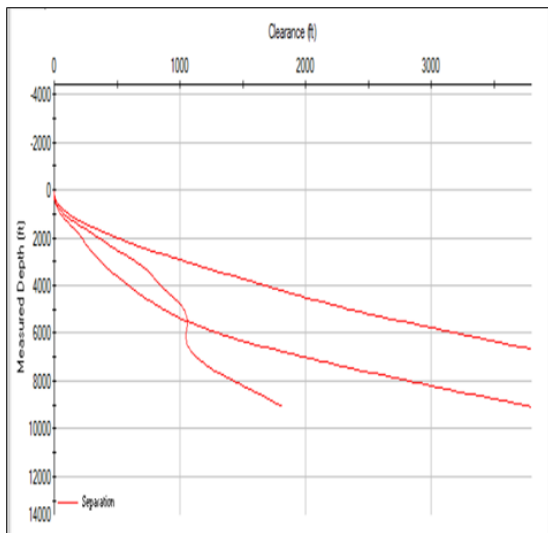


Fig. 3. Clearance vs. measured depth

Fig.3 shows the clearance results between the subject well and offset well 1, offset well 2 and offset well 3. It shows from the graph that MD of these offset wells and their distance from the subject or planned wells. This graph summarizes the results obtained in table 1 to table 3 as shows that the three wells keep away from the planned well with adequate separation that maintains the separation control rule.

3.5. Anti-collision separation results

Table 4 shows the anti-collision summary of the proximity calculation of the subject well and three offset wells. The proximity calculations were Separation centre to centre distance, allowable deviation separation factor and minimum allowable separation. These calculations are carried between the subject well and three offset wells 1,2 and 3 in terms of Measured depth (MD) and True Vertical Depth (TVD). The separation factor for offset well (1) ranges from 11 to 377.9 at the target depth. While the separation factor for offset well (2) ranges from 3 to 290.61 at the target depth. In addition to these wells, offset well (3) have a separation factor range from 6.21 to 215.99 at the target depth. From these data, the most risk well is offset well (2) as it is the closest well to the subject well. Furthermore, this is confirmed through minimum allowable separation as it ranges from 3.75-390.6 ft, 3.75- 436.65, 3.75-487.74 ft for offset wells 1,2 and 3 respectively.

Table 4. Anti-collision proximity calculations summary

Offset trajectory	Separation Ct-Ct (ft)	Allowable deviation (ft)	Separation factor	MAS	Subject trajectory	
					MD ft	TVD ft
Offset well 1	30	26.25	11	3.75	0	0
	30	26.25	11	3.75	100	100
	29.96	26.14	598	3.82	200	200
	30.25	25.09	29.57	5.16	400	400
	46.73	39.1	17.08	7.63	700	699.63
	75.39	64.8	15.99	10.59	1300	1292.6
	9500	9109.14	377.8	390.86	11082.91	2500
Offset well 2	10	6.25	3	3.75	0	0
	10	6.25	3	3.75	0	0
	7.81	1.78	3.5	6.03	500	499.98
	7.01	0.66	2.6	6.35	600	599.88
	11	3.99	3.91	7.01	700	699.63
	40.75	30.51	8.84	10.24	1200	1196.07
	9500	9063.35	290.61	436.65	11082.91	2500
Offset well3	18.03	14.28	6.21	3.75	0	0
	18.03	14.28	6.21	3.75	100	100
	16.14	10.54	11.04	5.6	400	400
	24.57	17.36	9.56	7.21	700	699.63
	47.75	39.06	13.73	8.69	1200	1196.07
	49.62	39.8	11.64	9.82	1300	1292.6
	9500	9012.26	215.99	487.74	11082.91	2500

Table 5 shows the detailed anti-collision report for the subject well and the three offset wells. This report shows the centre to centre distance, separation factor (OSF), classification of the OSF according to the alerts and the status. From the results, the OSF for offset well 1 and offset well is greater than 5 that drilled safely with an appropriate separation. While for offset well 2, the separation factor (OSF) is 5 along with MD depth from 500 ft to 7000 ft. In addition, according to the rules for OSF, this well enters the alert zone at 500 and exit at 7000 ft. Moreover, the subject well is saved from the collision with offset well 2 through consideration of the novel OSF method.

Table 5. Anti-collision proximity calculations summary

Offset trajectory	Separation Ct-Ct (ft)	Separation factor			Alert	Status
		Alert	Minor	Major		
Offset well 1	30				Surface	Pass
	30				MintPt-O-SF	
	29.96				MintPt-CTCT	
	30.25				MinPt-O-ADP	
	46.73				MintPt-O-SF	
	75.39				MintPt	
	9500				TD	
Offset well 2	10	5			Enter Alert	
	10	5			Exist alert	
	7.81	5			Enter Alert	
	7.01				MinPts	
	11	5			Exist alert	
	40.75				MinPts	
	9500				TD	
Offset well 3	18.03				surface	Pass
	18.03				MintPt-O-SF	
	16.14				MinPts	
	24.57				MintPt-O-SF	
	47.75				MinPts	
	49.62				MintPt-O-SF	
	9500				TD	

3.6. Graphical result of anti-collision planning

3.6.1. Travelling cylinder plots

Fig.4 Shows the travelling cylinder plot for the subject well and the three offset wells. The plot shows the MD of these wells and their azimuth in comparison with the subject well. This plot yield that subjects well is drilled safely with appropriate separation from the offset wells from 120 degrees to 320-degree azimuth at the target depth.

Moreover, Fig.5 shows the travelling cylinder plot of these offset wells with respect to subject well as shown in Fig.4 but have drilling tunnel that comparing the position of the projection versus the NO-GO zones. The circles of NO-GO are plotted around the trajectories of the offset wells and subject well for a depth through using the circle radius equal to minimum allowable separation MAS as calculated in proximity calculations.

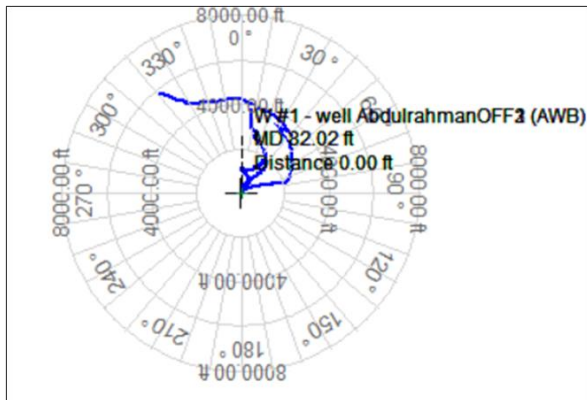


Fig. 4. Travelling cylinder plot of anti-collision well planning

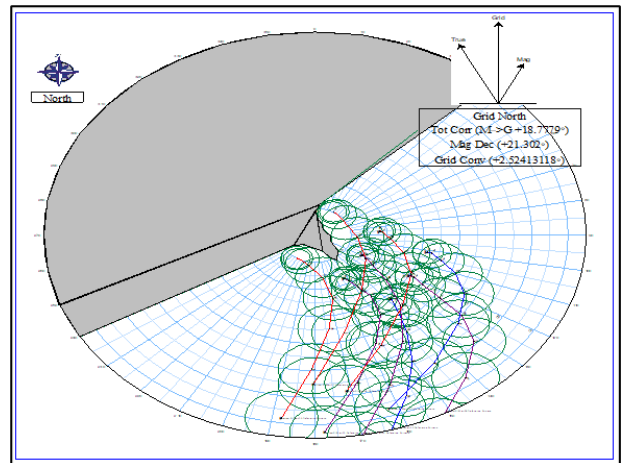


Fig. 5. Traveling cylinder plot with drilling tunnel

3.6.2. Spider plot

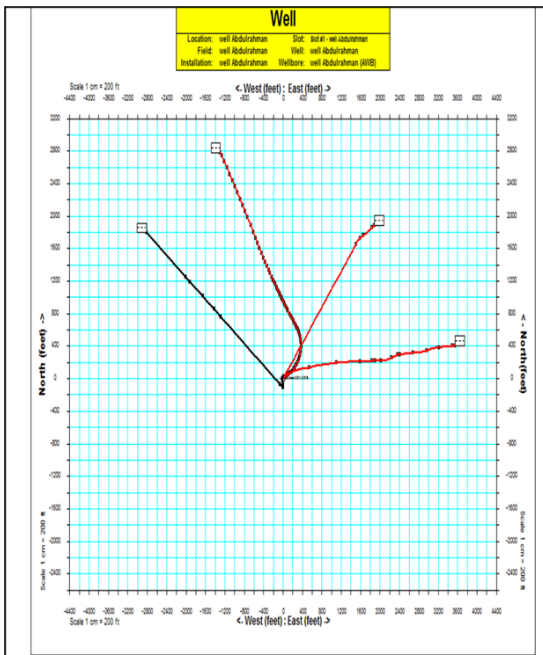


Fig.6 shows spider plot result that shows the offset wells in red line and the subject well in black colour that shows the direction of the offset wells and planned wells with respect to the north and west or east coordinates. From this plot, the subject well has clear distance from the offset wells at 0 degrees at the surface to 3200-degree West at target and 0 at 0 degrees at the surface to 1800-degree North at target.

Fig. 6. Spider plot

3.7. Optimization of the drilling performance results

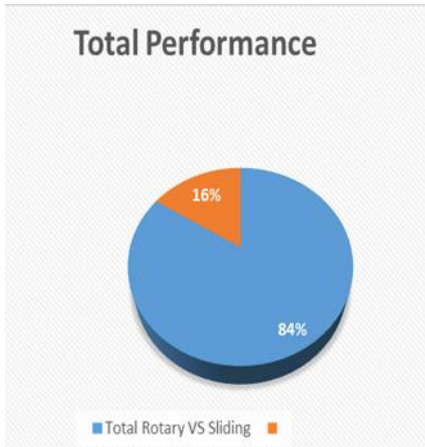


Fig. 7 Total Performance of drilling

Fig.7 shows the comparison between the total rotation versus the sliding of the drill string due to the adequate planning of the anti-collision well, as shown the rotation represents 84 % while the sliding is 16 %. This result indicates good drilling performance as the rotation is greater than sliding due to the sliding cause more friction force on the drill string, cause limitation of the weight on the bit which results in lower ROP. While the Rotation results in better hole cleaning, lower friction, higher ROP and higher WOB. Accordingly, the drilling time is faster with greater rotation than sliding.

3.8. Economic results

3.8.1. Progress and cost chart

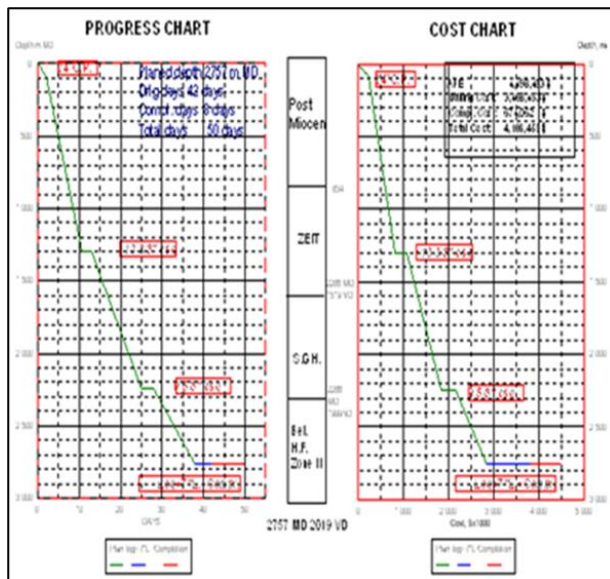


Fig. 8. Progress and cost chart

Fig.8 shows the progress and cost chart. The progress chart shows in the x-axis days and the Y-axis depth which shows the progress of drilling operation about 50 days with the total cost of 4,498,453 K \$.

3.8.2. Economic analysis

The NPV of 305.7 million \$ and the lifetime of the project will be 34 years with the internal rate of return of 105 %, rate of return of 8.55 and the discounted rate of return of 4.57.

It can be shown from the Fig.9 pay-out time is obtained at 0.7 years which is the point of intersection where the NPV becomes zero. Fig.10 shows the discount factor percentage in the X-axis the net present value (NPV) in the Y-axis. The intersection of the line with the Discount factor percentage that results in the NPV to be zero. This IRR gives an indication of the profitability of the project where appear in this plot at 105%.

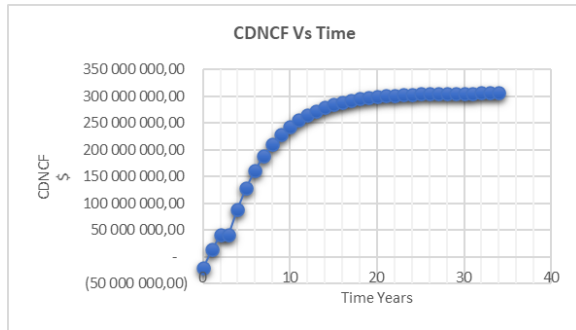


Fig. 9. CDNCF vs time

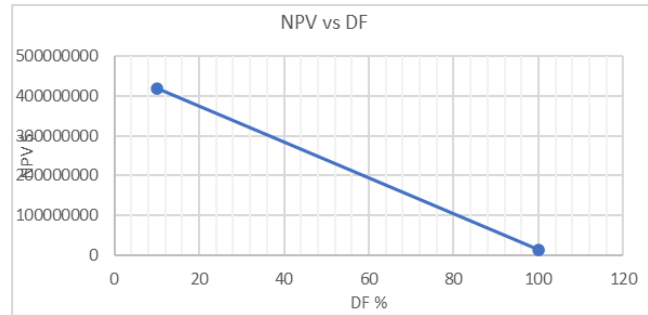


Fig. 10. NPV vs DF

4. Conclusion

The proposed well is drilled in the neighbouring of Offset well 1, Offset well 2 and Offset well 3 safely according to the separation rules. The anti-collision summary shows that the well is entered only the alert zone and redesign the plan to exit from the alert zone to drill safely and avoid the collision of the offset wells. The travelling cylinder plot that shows the clearance of the planned well and the offset wells through the measured depth and the azimuth of the wells which helps in avoid the collision with offset wells. Similarly, the spider plot shows the projection of the horizontal plane that appear the wells that exist in a given area as if not isolation on it as the earth was transparent which is used to avoid the collision between the wells an ensure the separation between the wells is maintained similarly to the travelling cylinder. The drilling is optimized as the rotation represent 84 % while the sliding is 16 %. This result indicates good drilling performance as the rotation is greater than sliding due to the sliding cause more friction force on the drill string. The drilling and completion time of the well is 50 days and along with the cumulative cost of 4,498,453 K \$. Finally, economic analysis shows positive income as NPV of 305.7 Million \$ and the lifetime of the project will be 34 years with the internal rate of return of 105 %, rate of return of 8.55 and the discounted rate of return of 4.57.

References

- [1] Aadnoy B, Cooper I, Miska S, Mitchell RF, and Payne ML. Advanced Drilling and Well Technology. Society of Petroleum Engineers 2009, ISBN10 1555631452.
- [2] Bourgoyne AT, Milheim KK, Chenevert ME, Young Jr FS. Applied Drilling Engineering. Society of Petroleum Engineers 1986, .
- [3] Poedjono B,Chinh PV, Isevcan E, Walker JR, Gonzalez LF, McCulloch S, Juarez F, Moreno VH. Case Studies in the Application of an Effective Anti-collision Risk Management Standard. SPE International Conference on Health, Safety and Environment in Oil and Gas Exploration and Production, 12-14 April, Rio de Janeiro, Brazil, SPE-126722-MS. <https://doi.org/10.2118/121040-MS>.
- [4] Chen DC-K. Integrated BHA Modeling Delivers Optimal BHA Design. SPE/IADC Middle East Drilling and Technology Conference (p. 11). Cairo 2007, SPE-106935-MS. <https://doi.org/10.2118/106935-MS>.
- [5] Spidle K. Drilling Office X (DOX) Technical Manual/Anti-Collision. Schlumberger 2012, 41.
- [6] Adly E. Rotary Steerable System Technology Case Studies in the Canadian Foothills. American Association of Drilling Engineers 2007, 9.
- [7] Montecinos J. Directional Control & Surveying Procedures. ENI 2012, 67.
- [8] Wilson G. Radius of Curvature Method for Computing Directional Surveys. SPWLA 9th Annual Logging Symposium, Louisiana 1968: SPWLA-1968-D.

To whom correspondence should be addressed: Abdulrahman Mohamed, Department of Petroleum Engineering and Gas Technology, Faculty of Energy and Environmental Engineering, The British University in Egypt, Cairo, Egypt, E-mail: abdulrahman.mohammed@hotmail.com